
Technical Data Sheet


Welded on top plate



Screwed on top plate



Detailed view

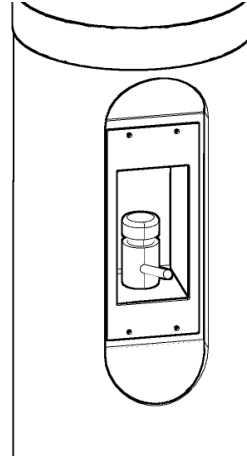

Design:	High security bollard for installation in reinforced foundation	
Impact Energy:	1852 kJ (7.5 t @ 80 km/h) Construction based on crash test certified fixed bollard P80 SF, designed to withstand the impact of a 7.5 ton truck travelling at a speed of 80 km/h according to PAS 68	
Blocking Height*:	1080 mm	* without top plate and acrylic ring
Blocking Element:	273 mm diameter, approx. 16 mm wall thickness, with welded on top plate	
Foundation Insertion:	Min. 400 mm	
Foundation Depth:	Min. 450 mm	
Road Covering:	Depending on selected foundation insertion, max. 170 mm	
Features:	Theft-proof mounted, hand-operated and high-gloss chrome plated disinfectant dispenser with high quality metal pump, 141.6 mm outlet and refill container with approx. 1 litre capacity 50 mm high, reflective warning band	
Options:	Stainless steel screwed on bollard top plate D280 complete with 17 mm visible acrylic ring and LED-RGB-bollard lighting Turned blocking element for improved surface quality	
Total Length*:	1650 mm	* without top plate, bottom transport aid and acrylic ring
Weight:	Approx. 170 kg	
Colour (Standard):	RAL 6005 moss green, RAL 7016 anthracite grey, RAL 7030 stone grey, RAL 7035 light grey or RAL 9010 pure white	
Colour (Optional):	Other RAL colours or DB colours	